

### SPECIFICATIONS

CONTACT DISC: Stainless steel

RATING: 50mA , 12VDC

STROKE: 0.2 ± 0.10mm


OPERATION TEMPERATURE RANGE : -25°C to 70°C

CONTACT RESISTANCE: 100mΩ max.




### MODEL OPTIONS



TL-6




MODEL NO	FORCE	COLOR
TL-61-V	100±50g	K-Black
TL-62-V	160±50g	N-Brown
TL-63-V	260±50g	W-White

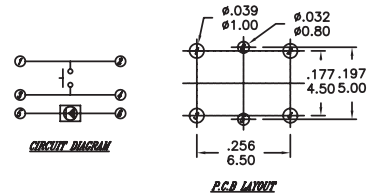

**NOTE:**  
 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.  
 2. GENERAL TOLERANCES MAX. ± 0.20mm.



TLL-6



Series Name: **TLL-63AR-V** LEAD FREE

With LED:  LED Color: 

R	Red	B	Blue
Y	Yellow	W	White
G	Green	O	Orange




OF: 

1	100g
2	160g
3	260g






 LED Shape: 

A	B	C
---	---	---

\*Customer can provide their own LED (with specs in details)  
 \*White is not available in B shape,  
 Orange is not available in A shape

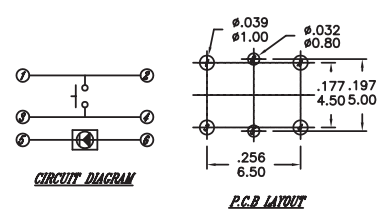

TLM-6



TL  
 Multi Function Switches